



# Model 960

## Model 960 Specifications

### Electrical

- Input Voltage ..... 4.75 to 26 VDC max
- Regulation..... 100 mV peak-to-peak, max ripple at 0 to 10 kHz
- Input Current..... 100 mA max with no external load
- Output Format ..... Absolute- Parallel Outputs
- Output Type ..... Open Collector- 20 mA max per channel  
Push-Pull- 20 mA max per channel
- Code ..... Gray Code, Excess Gray Code
- Max Frequency..... 25.6 kHz (LSB)
- Rise Time..... Less than 1 microsecond
- Resolution..... Up to 11 bit
- Accuracy..... ±1/2 LSB

### Control

- Directional Control.... Field selectable for increasing counts (CW or CCW). Standard configuration user selects the applicable MSB wire for direction of count. Direction control option allows user to select count direction by applying 0 VDC to an encoder input. See *Absolute Wiring Tables* below.


### Mechanical

- Max Shaft Speed..... 6000 RPM continuous (CW or CCW)
- Bore Size ..... 0.250", 0.3125", 0.375", 6 mm, 8 mm, 10 mm
- Bore Tolerance ..... -0.0000" / +0.0006"
- User Shaft Tolerances
- Radial Runout..... 0.007"
- Axial Endplay..... ±0.030"
- Starting Torque ..... 0.3 oz-in typical for thru-bore  
0.14 oz-in typical for hollow bore
- Max Acceleration..... 1 x 10<sup>5</sup> rad/sec<sup>2</sup>
- Electrical Conn ..... Gland with 18" cable (braid shield, 30 AWG conductors)
- Housing..... Aluminum with non-corrosive finish
- Mounting..... Slotted Flex Mount standard, Flex-Mount Arm optional
- Weight..... 7 oz typical


### Environmental

- Operating Temp..... 0° to 70° C
- Storage Temp ..... -20° to +85° C
- Humidity..... 98% RH non-condensing
- Vibration..... 10 g @ 58 to 500 Hz
- Shock..... 20 g @ 11 ms duration

## Model 960 Slotted Flex Mount (SF)

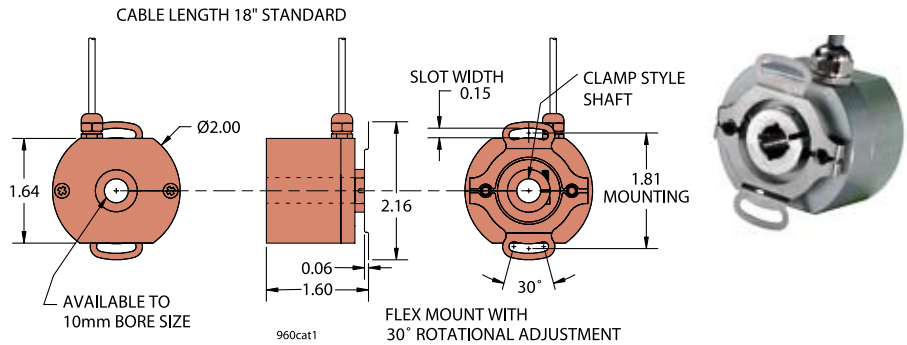

## Model 960 With Flex Arm (FA)

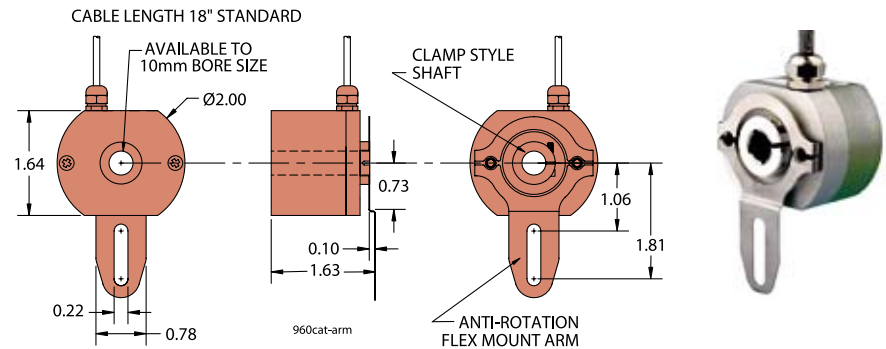

All dimensions are in inches with a tolerance of ±0.005" or ±0.01" unless otherwise specified

### Wiring Table

Function	Wire Color
Common	Black
+VDC	Red
S1 cw MSB	Brown
S1 ccw MSB	Yellow
S2	White
S3	Green
S4	Orange
S5	Blue
S6	Violet
S7	Gray
S8 LSB 8-bit	Pink
S9 LSB 9-bit	Red/Green
S10 LSB 10-bit	Red/Yellow
S11 LSB 11-bit	Turquoise
Direction Control**	Red/Blue
Case Ground*	Shield

\*CE Option Only

\*\*Standard is CW increasing count (when viewed from shaft end, and using brown wire for MSB). Red/Blue is pulled up internally to 5 VDC. To reverse count direction, Red/Blue must be pulled low (0 VDC). If 5 VDC is applied to Red/Blue, unit remains in standard CW increasing count mode. Count direction can also be reversed by using the Yellow MSB wire instead of the Brown. At no time should voltage applied to Red/Blue exceed 5 VDC