


ACX50 - DRAW WIRE SENSOR

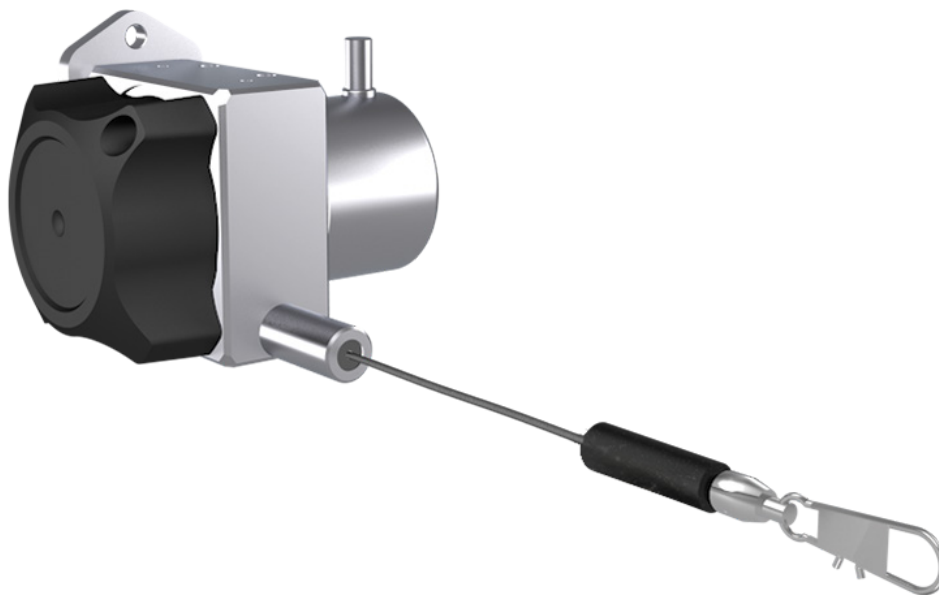

ACX50

KEY-FEATURES:

- Measurement ranges from 50 to 1250 mm
- Analog output: potentiometer, voltage, current
- Linearity up to $\pm 0.02\%$ of full scale
- Protection class up to IP67
- Temperature range: -20 to $+85$ °C (optional -40 °C or $+120$ °C)
- High dynamics and interference immunity factor
- Customized versions available
- Optional with TEDS connector

TECHNICAL DATA ANALOG OUTPUT




Measurement range MR ¹⁾	[mm]	50	75	100	125	150	225	250	300	375	500	625	750	1000	1250
Linearity	[%]	±0.5				±0.15								±0.1 ²⁾	
Improved linearity (optional) ²⁾	[%]	-				±0.1								±0.05	
Improved linearity (optional) ³⁾	[%]	±0.1				-									
Resolution		see output types below													
Sensor element		Hybrid Potentiometer													
Connection		connector output M12 axial or cable output axial (TPE cable)													
Protection class		IP65, optional IP67													
Humidity		max. 90 % relative, no condensation													
Temperature		see output types below													
Mechanical data		extraction force, max. velocity and max. acceleration see “Mechanical Data”													
Housing		aluminum, anodised, spring case PA6													
Draw wire		stainless steel V2A Ø 0.5 mm													
Weight	[g]	300 to 500, depending on the measurement range													

¹⁾ other ranges on request

²⁾ linearity max. ±0.15 % in combination with outputs 5R and 10R

³⁾ special version with unprotected potentiometer, protection class IP40, only in combination with potentiometer output 1R
(please contact the WayCon sales team)

ELECTRICAL DATA ANALOG OUTPUT

Output type	Potentiometer			Voltage ¹⁾				Current
Order Code	1R	5R ²⁾	10R ²⁾	4,5V	5V	55V	10V	420A
Output	1 kΩ	5 kΩ	10 kΩ	0.5 to 4.5 V	0 to 5 V	-5 to +5 V	0 to 10 V	4 to 20 mA
Supply	max. 30 V			8 to 30 VDC			12 to 30 VDC	12 to 30 VDC ³⁾
Recommended cursor current	<1 μA			-				
Current consumption max.	-			max. 25 mA (no load)				-
Power consumption max.				-				
Output current	-			max. 10 mA, min. load 10 kΩ				max. 50 mA in case of error ⁴⁾
Dynamics	-			<3 ms from 0 to 100 % and 100 to 0 %				<1 ms from 0 to 100 % and 100 to 0 %
Resolution	theoretically unlimited, limited by the noise							
Noise	depends on the quality of the power supply			0.5 mV _{eff}				1.6 μA _{eff}
Inverse-polarity protection	-			yes				
Short-circuit proof	-			yes				-
Operating temperature	-20 to +85 °C / optional: -40 to +85 °C or -20 to +120 °C			-20 to +85 °C / optional: -40 to +85 °C				
Temperature coefficient	±0.0025 %/K			0.0037 %/K				0.0079 %/K
EMC	-			according to EN 61326-1:2013				
Circuit								

¹⁾ Galvanically isolated

²⁾ only for measurement ranges ≥150 mm

³⁾ Load: 250 Ω (max. 500 Ω)

⁴⁾ Load max. 0.5 kΩ

MFL = multi-functional line

TECHNICAL DATA DIGITAL OUTPUT ABSOLUTE CAN_{OPEN} (WCAN)

Measurement range	[mm]	50	75	100	125	150	225	250	300	375	500	625	750	1000	1250
Linearity	[%]	±0.5				±0.15							±0.1		
Improved linearity (optional)	[%]	-				±0.1							±0.05		
Resolution		0.002 % of the measurement range													
Sensor element		Potentiometer													
Connection		connector output M12 axial or cable output axial (TPE cable)													
Protection class		IP65, optional IP67													
Humidity		max. 90 % relative, no condensation													
Operating temperature	[°C]	-20 to +85 / optional: -40 to +85													
Mechanical data		extraction force, max. velocity and max. acceleration see “Mechanical Data”													
Housing		aluminum, anodised, spring case PA6													
Draw wire		stainless steel V2A Ø 0.5 mm													
Weight	[g]	300 to 500, depending on the measurement range													

ELECTRICAL DATA DIGITAL OUTPUT ABSOLUTE CAN_{OPEN} (WCAN)

Link to the manual		CANopen (WCAN)
CAN specification		Full CAN 2.0B (ISO11898)
Communication profile		CANopen CiA 301 V 4.2.0
Device profile		Encoder, absolute linear; CiA 406 V 3.2.0
Error control		Producer Heartbeat, Emergency Message, Node Guarding
Node ID		Default: 7, configurable via SDO
PDO		1 x TPDO, static mapping
PDO Modes		Event-triggered, Time-triggered, Sync-cyclic, Sync-acyclic
Transmission rate		1 Mbps, 800, 500, 250, 125, 50, 20 kbps configurable via SDO
Integrated Bus termination resistor		120 Ω, connectible via SDO
Bus, galvanic separation		No
Supply	[VDC]	8 to 30
Current consumption		10 mA typical at 24 V, 20 mA typical at 12 V
Measurement rate		1 kHz with 16-bit resolution
Electrical protection		inverse polarity protection
Temperature coefficient	[%/K]	0.0014
EMC		DIN EN61326-1:2013, conformity with directive 2014/30/EU

MECHANICAL DATA


Measurement range [mm]	Extraction force		Speed ¹⁾	Acceleration ¹⁾	Extraction force: Option HG		Acceleration: Option HG
	F _{min} [N]	F _{max} [N]	V _{max} [m/s]	a _{max} [m/s ²]	F _{min} [N]	F _{max} [N]	a _{max} [m/s ²]
50	5.4	6.8	8	250	9.8	12.4	350
75	3.8	4.6	8	150	7	8.4	300
100	3	3.6	8	150	5.4	6.4	250
125	4.2	5.2	10	200	-		
150	5.8	7.4	8	250	10.9	13.2	350
225	3.8	4.8	8	150	6.6	8.6	300
250	5.6	7.2	8	250	10	13.2	350
300	3	3.6	8	150	5.4	6.6	250
375	4.4	5.4	10	200	-		
500	3	4	8	150	5.8	7.2	250
625	4	5.4	10	200	-		
750	3.6	5.2	8	150	6.6	9.4	300
1000	2.8	4	8	150	5	7.2	250
1250	3.8	5.6	10	200	-		

¹⁾ reduced to 60 % with option IP67


TECHNICAL DRAWING ANALOG OUTPUT AND DIGITAL OUTPUT WCAN

Output	B
Potentiometer	65
Voltage / Current	78.5
WCAN	78.5

Measurement range	Option	A	C
50 / 150 / 250	Standard	26.5	21.3
75 / 225 / 750	Standard	26.5	17
100 / 300 / 500 / 1000	Standard	26.5	12.75
125 / 375 / 625 / 1250	Standard	33.5	10.3
50 / 150 / 250	IP67 / ICP / HG	33.5	21.3
75 / 225 / 750	IP67 / ICP / HG	33.5	17
100 / 300 / 500 / 1000	IP67 / ICP / HG	33.5	12.75

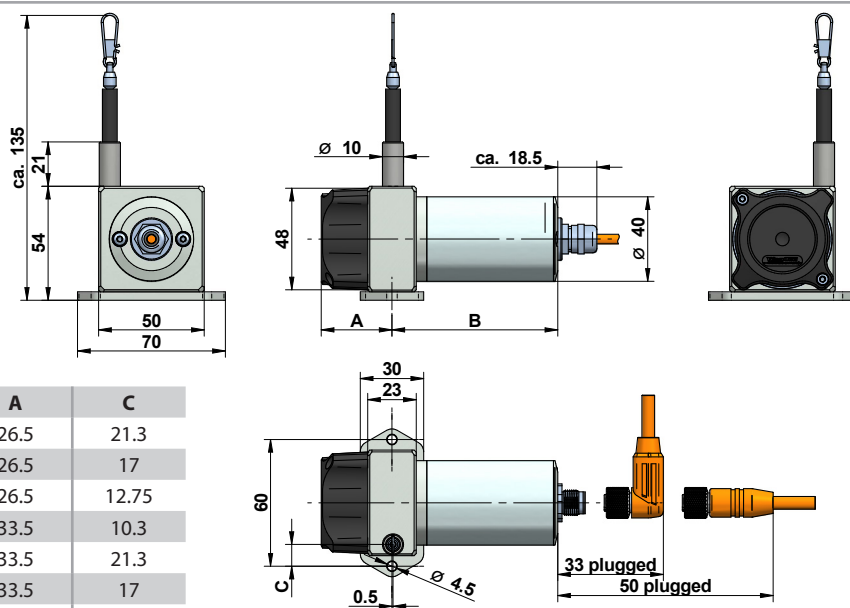


TECHNICAL DRAWING OPTIONS CHANGED ROPE OUTLET AND CABLE OUTPUT

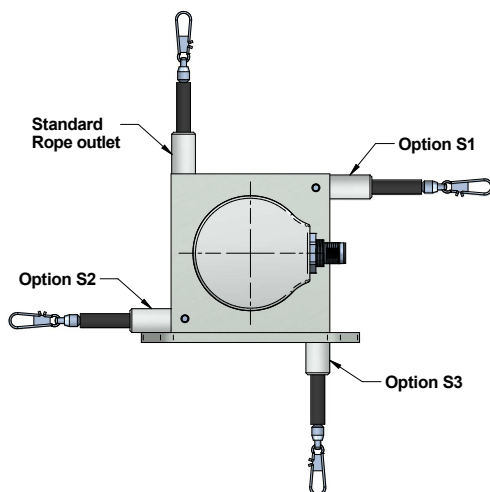

Mounting: standard rope outlet, rope outlet sideways top (S1)


The sensor is usually installed by using the regular mounting plate (see technical drawing above). By disassembling the mounting plate, there are 4 threads (2 x M3, 2 x M5) in the sensor housing for alternative installation.







Mounting: rope outlet sideways bottom (S2), rope outlet bottom (S3)

Sensors with option rope outlet S2 and S3 have a modified base plate:

Measurement range	C
50 / 150 / 250	21.3
75 / 225 / 750	17
100 / 300 / 500 / 1000	12.75
125 / 375 / 625 / 1250	10.3



OPTIONS

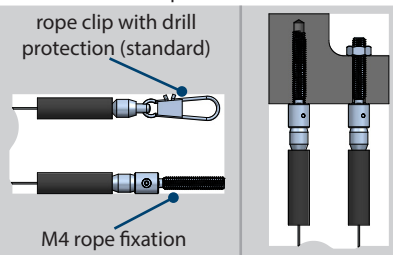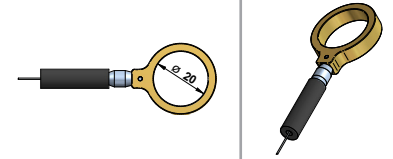
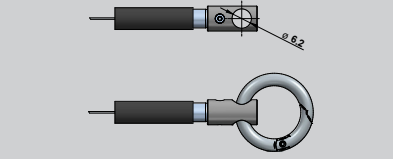
Option	Order code	Description
Cable or connector orientation	-	Standard: sideways, opposite to the rope outlet
Improved linearity	L02, L05, L10	Improved linearity 0.02 % (L02), 0.05 % (L05) or 0.1 % (L10)
Inverted output signal (analog output only)	IN	The analog signal of the sensor is increasing by extracting the rope (standard). Option IN inverts the signal, i.e. the signal of the sensor declines by extracting the rope. <div>  </div>
Changed rope outlet (see drawing on page 5)	S1, S2, S3	Standard: rope outlet at the top S1: rope outlet sideways at the top S2: rope outlet sideways at the bottom (modified mounting plate, see page 7) S3: rope outlet on the bottom (modified mounting plate, see page 7)
Synthetic wire rope	COR	Synthetic wire rope, made out of abrasion resistant and enhanced Coramid. We recommend COR at stable temperatures due to the coefficient of expansion.
Rope fixation by M4 thread	M4	Optional, pivoted rope fixation with screw thread M4, length 22 mm. Ideal for attachment to through holes or thread holes M4. <div>  </div>
Rope fixation by eyelet	RI	The end of the wire rope is equipped with a eyelet instead of a rope clip. Inside diameter 20 mm <div>  </div>
Rope fixation with cylindrical pin and M6 through bore	ZH, ZR	ZH: cylindrical pin with M6 through bore ZR: cylindrical pin with M6 through bore and carbine ring <div>  </div>
Protection class IP67	IP67	Use option IP67, if the sensor will operate in a humid environment. Note that with this option there may occur a light hysteresis in the output signal due to the special sealing. The max. acceleration and displacement speed are reduced to 60 % of the specified value.
Corrosion protection	CP	Includes a V4A wire rope, stainless steel bearings and option M4. The sensors rope drum gets HARTCOAT® coated. This coating is a hard-anodic oxidation that protects the sensor from corrosion by aggressive media (e. g. sea water) with a hard ceramics-like layer.
Increased corrosion protection (analog output only)	ICP	Components of the housing and the rope drum get HARTCOAT® coated. Includes the options CP, IP67 and M4.
Increased extraction force (analog output only, not for MR 125/375/625/1250)	HG	A reinforced spring drive provides a greater rope tension and allows a higher rope acceleration. Please note the different dimensions of the housing.
Increased temperature range High (potentiometer output only)	H120	Sensors with potentiometer output and cable output can be operated from -20 to +120 °C when this option is used.
Increased temperature range Low (analog output only)	T40	Special components and a low temperature grease make a working temperature down to -40 °C (up to +85 °C) possible.
TEDS connector (in combination with analog and cable output only; more information about TEDS)	TD, TDP, TDPS	TD: Assembling TDP: Assembling + programming TDPS: Assembling + programming + 35 measurement points

ACCESSORIES

Deflection pulley - UR2

The rope must be extracted from the sensor vertically. The maximum variation from the vertical is 3°. A deflection pulley allows a change in the direction of the wire rope. Several pulleys may be used. The rope clip must not be guided over the deflection pulley. Suitable for standard wire rope diameter 0.5 mm.

Material foot: anodized aluminum
 Material rope wheel: POM-C
 Mounting: by 2 hexagon socket or countersunk screws M6, vertical or horizontal mounting possible. Ball bearings: with special low temperature grease and RS-sealing.
 Temperature: -40 to +80 °C

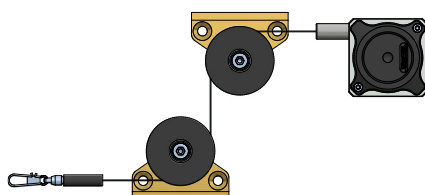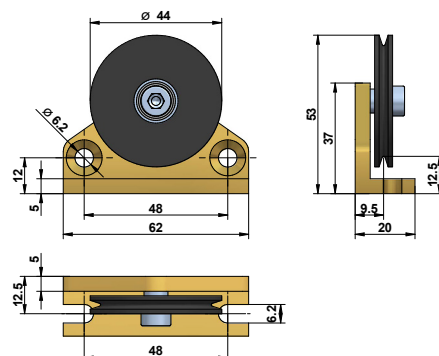

Rope extension - SV


For bridging a greater distance between the measuring target and the sensor a rope extension can be applied. The rope clip must not be guided over the deflection pulley.

Please specify the length needed in your order (XXXX). The minimum length is 150 mm:

SV1-XXXX: rope extension (150 to 4995 mm)

SV2-XXXX: rope extension (5000 to 19995 mm)


SV3-XXXX: rope extension (20000 to 40000 mm)



Magnetic clamp - MGG2


Use the magnetic clamp to quickly attach the rope to metallic objects without any assembly time. A rubber coating provides gentle contact (e. g. on varnished surfaces) and prevents from slipping due to vibration.

The magnet consists of a neodymium core for an increased adhesive force of 100 N. The hook makes it easy to attach the rope clip.



Rope cleaner - RCS

Use the RCS rope cleaner to remove dirt from the measuring rope of the sensor. Please note that the maximum measuring range of the sensor is reduced by 29 mm and that the RCS is not compatible with the option RI.

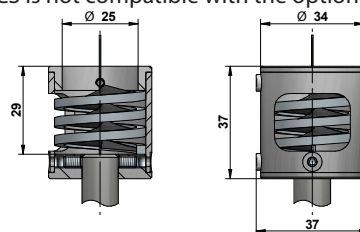

ORDER GUIDE ANALOG OUTPUT

ACX50 - ☐ - ☐ - ☐ - ☐

Measurement range MR [mm]	
50 / 75 / 100 / 125 / 150 / 225 / 250 / 300 / 375 / 500 / 625 / 750 / 1000 / 1250	

Output signal		
Potentiometer	1 kΩ	1R
Potentiometer	5 kΩ ¹⁾	5R
Potentiometer	10 kΩ ¹⁾	10R
Voltage	0.5 to 4.5 V	4,5V
Voltage	0 to 5 V	5V
Voltage	-5 to +5 V	55V
Voltage	0 to 10 V	10V
Current	4 to 20 mA	420A

Connection	
Connector output M12, axial, 4 poles	SA12
Cable output, axial, 2 m, 4 poles	KA02
Cable output, axial, 5 m, 4 poles	KA05
Cable output, axial, 10 m, 4 poles ²⁾	KA10

Version	
Standard	-
Sensor with options	O

¹⁾ for measurement ranges 150 mm or more only

²⁾ larger lengths on request

³⁾ for more information about TEDS connectors see [here](#)

Bold text: standard with shorter lead time

Option	Description (see page 6)
L05	Improved linearity ±0.05 %
L10	Improved linearity ±0.1 %
IN	Inverted output signal
S1	Rope outlet sideways top
S2	Rope outlet sideways bottom
S3	Rope outlet bottom
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
IP67	Protection class IP67
CP	Corrosion protection
ICP	Increased corrosion protection
HG	Increased extraction force
H120	Increased temperature range -20 to +120 °C
T40	Increased temperature range -40 to +85 °C
TD	TEDS: assembling ³⁾
TDP	TEDS: assembling + programming ³⁾
TDPS	TEDS: assembling + programming + 35 measurement points ³⁾

Option	Not combinable with
L05	5R, 10R
L10	5R, 10R
COR	H120
M4	CP, ICP
RI	CP, ICP
ZH	CP, ICP
ZR	CP, ICP
IP67	HG, H120, ICP
CP	M4, RI, ZH, ZR, ICP
ICP	M4, RI, ZH, ZR, IP67, CP, HG
HG	MR 125/375/625/1250, IP67, ICP
H120	MR 50/75/100/125, 4,5V, 5V, 55V, 10V, 5VT, 10VT, 420A, SA12, COR, IP67, CP, ICP, T40, TD, TDP, TDPS
T40	H120
TD	1R, 5R, 10R, SA12, H120, TDP, TDPS
TDP	1R, 5R, 10R, SA12, H120, TD, TDPS
TDPS	1R, 5R, 10R, SA12, H120, TD, TDP

ORDER GUIDE DIGITAL OUTPUT ABSOLUTE CAN_{OPEN} (WCAN)

ACX50 - - - -

Measurement range MR [mm]	
50 / 75 / 100 / 125 / 150 / 225 / 250 / 300 / 375 / 500 / 625 / 750 / 1000 / 1250	

Output signal	
CANopen	WCAN

Connection	
Connector output M12, axial, 5 poles	SA12
Cable output, axial, 2 m, 5 poles	KA02
Cable output, axial, 5 m, 5 poles	KA05
Cable output, axial, 10 m, 5 poles ¹⁾	KA10

Version	
Standard	-
Sensor with options	O

¹⁾ larger lengths on request

Option	Description (see page 6)
L05	Improved linearity ±0.05 %
L10	Improved linearity ±0.1 %
S1	Rope outlet sideways top
S2	Rope outlet sideways bottom
S3	Rope outlet bottom
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
IP67	Protection class IP67
CP	Corrosion protection
ICP	Increased corrosion protection
HG	Increased extraction force
T40	Increased temperature range -40 to +85 °C

Option	Not combinable with
M4	CP, ICP
RI	CP, ICP
ZH	CP, ICP
ZR	CP, ICP
IP67	HG, ICP
CP	M4, RI, ZH, ZR, ICP
ICP	M4, RI, ZH, ZR, IP67, CP, HG
HG	MR 125/375/625/1250, IP67, ICP

GENERAL ACCESSORIES

UR2	deflection pulley (for rope diameter 0.5 mm)	SV1-XXXX	rope extension (150 mm up to 4995 mm)
MGG2	magnetic clamp	SV2-XXXX	rope extension (5000 mm up to 19995 mm)
RCS-ACX50 ¹⁾	rope cleaner	SV3-XXXX	rope extension (20000 mm up to 40000 mm)

¹⁾ please note that the maximum measuring range is reduced by 29 mm when using the rope cleaner. The RCS is not compatible with the option RI.

ANALOG OUTPUT ACCESSORIES

Cable with connector (female) M12, 4 poles, shielded, IP67		Mating connector (female) M12, 4 poles, IP67, for self assembly	
K4P2M-S-M12	2 m, straight connector	D4-G-M12-S	straight connector
K4P5M-S-M12	5 m, straight connector	D4-W-M12-S	angular connector
K4P10M-S-M12	10 m, straight connector		
K4P2M-SW-M12	2 m, angular connector		
K4P5M-SW-M12	5 m, angular connector		
K4P10M-SW-M12	10 m, angular connector		

DIGITAL OUTPUT ABSOLUTE CAN_{OPEN} (WCAN) ACCESSORIES

Cable with connector (female) M12, 5 poles, shielded, IP67	
K5P2M-S-M12	2 m, straight connector
K5P2M-SW-M12	2 m, angular connector