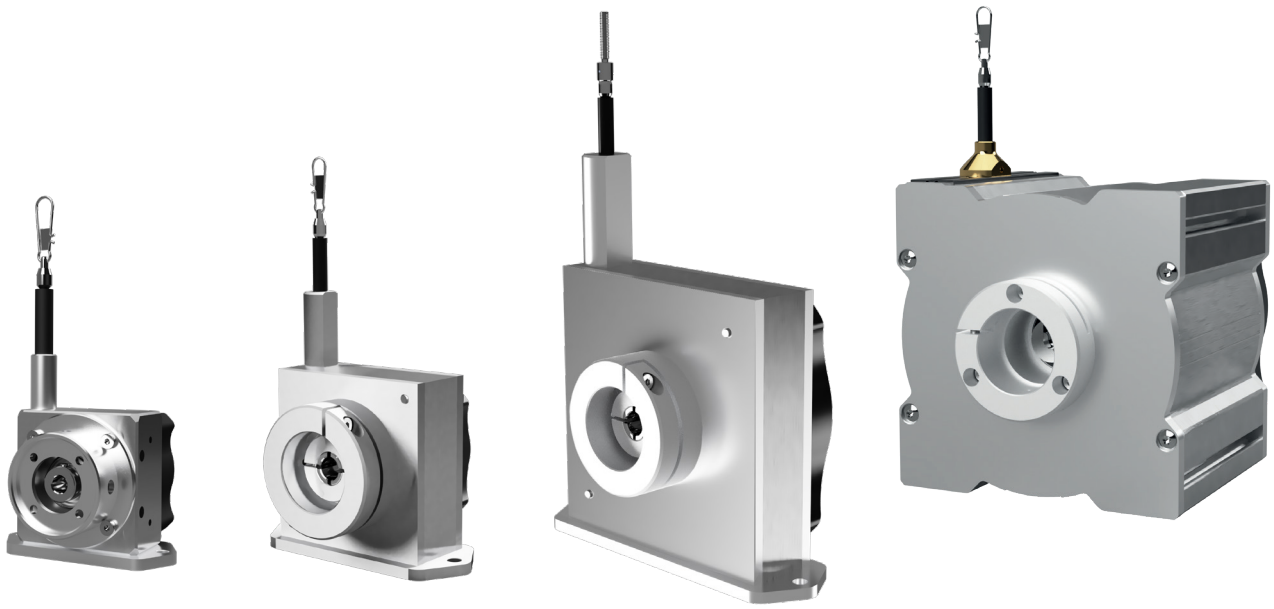


LCX SERIES
DRAW WIRE SOLUTIONS

KEY-FEATURES:

- Draw wire mechanisms for use with encoders
- Fast and easy encoder mounting
- Measurement ranges from 500 mm to 42.5 m
- Linearity up to ±0.02 % of full range (with encoder)
- Optional high corrosion protection
- Temperature range -20 to +85 °C (optional -40 °C)
- High dynamics
- Customized versions available

FLEXIBLE LINEAR MEASUREMENT FOR A WIDE RANGE OF APPLICATIONS

With measurement ranges from 500 mm to 42.5 meters, multiple housing sizes, flexible mounting options, and linearity up to ±0.02% of full range, the LCX Series makes it easy to configure an encoder based linear measurement solution for your application. Customized versions available.

Ideal for linear position and distance measurement in robotics, material handling equipment, elevators, cranes and booms, gantries, control gates, extrusion presses, textile machinery and theater or stage equipment.

© 2026 Encoder Products Company, REV 1.0 - 10/13/2026

TECHNICAL DATA LCX50

Measurement range	[mm]	500	750	1250
Linearity	[%]	±0.05 (with encoder output)		
Improved linearity (optional)	[%]	±0.02 (with encoder output) [1]		
Sheave circumference	[mm]	125		
Temperature	[°C]	-20 to +85 / optional: -40 to +85		
Extraction force F_{min}	[N]	3	3.2	4.6
Extraction force F_{max}	[N]	3.6	4.4	5.6
Velocity V_{max}	[m/s]	8		
Acceleration a_{max}	[m/s²]	200		
Housing		aluminum, anodized, spring case PA6		
Draw wire		stainless steel V2A Ø 0.5 mm		
Weight	[g]	300 to 500, depending on the measurement range		
Encoder requirements	[mm]	synchro flange diameter: 36.5, centering collar 33.1, shaft diameter: 6, shaft length: 12.5		

[1] Measured with reference encoder with 3600 pulses/revolution. Minimum encoder requirement for improved linearity: 2000 pulses/revolution

TECHNICAL DATA LCX80

Measurement range	[mm]	1000	1500	2000	2500	3000
Linearity	[%]	±0.05 (with encoder output)				
Improved linearity (optional)	[%]	±0.02 (with encoder output) [1]				
Sheave circumference	[mm]	200				
Temperature	[°C]	-20 to +85 / optional: -40 to +85				
Extraction force F_{min}	[N]	4.2		5		
Extraction force F_{max}	[N]	5.4		6.4		
Velocity V_{max}	[m/s]	8				
Acceleration a_{max}	[m/s²]	120				
Housing		aluminum, anodized, spring case PA6				
Draw wire		stainless steel V2A Ø 0.5 mm				
Weight	[g]	700 to 900, depending on the measurement range				
Encoder requirements	[mm]	clamping flange diameter: 36, shaft diameter: 10, shaft length: 20				

[1] Measured with reference encoder with 5000 pulses/revolution. Minimum encoder requirement for improved linearity: 2000 pulses/revolution

TECHNICAL DATA LCX120

Measurement range	[mm]	3000	4000	5000
Linearity	[%]	±0.05 (with encoder output)		
Improved linearity (optional)	[%]	±0.02 (with encoder output) [1]		
Sheave circumference	[mm]	317.68		
Temperature	[°C]	-20 to +85 / optional: -40 to +85		
Extraction force F_{min}	[N]	8		
Extraction force F_{max}	[N]	10	11	11,6
Velocity V_{max}	[m/s]	8		
Acceleration a_{max}	[m/s²]	120		
Housing		aluminum, anodized, spring case PA6		
Draw wire		stainless steel V2A Ø 0.5 mm		
Weight	[g]	1300 to 1600, depending on the measurement range		
Encoder requirements	[mm]	clamping flange diameter: 36, shaft diameter: 10, shaft length: 20		

[1] Measured with reference encoder with 5000 pulses/revolution. Minimum encoder requirement for improved linearity: 2000 pulses/revolution


© 2026 Encoder Products Company, REV 1.0 - 10/13/2026


TECHNICAL DATA LCX135

Measurement range	[m]	6	7	8	10	12	15	20	25	30	35	40	42.5
Linearity	[%]	±0.05 (with encoder output)											
Improved linearity (optional)	[%]	±0.02 (with encoder output) [1]											
Sheave circumference	[mm]	357.14			333.33								
Temperature	[°C]	-20 to +85 / optional: -40 to +85											
Extraction force F_{min}	[N]	7.8	8.2		4.8		6.8	6.4	7.8	6.4	7.4	5.4	
Extraction force F_{max}	[N]	13.6	15	15.2	7.2		11.2	9.2	11.4	9.6	11.6	9	
Velocity V_{max}	[m/s]	8			6			5					
Acceleration a_{max}	[m/s²]	120			80			60					
Housing		aluminum, anodized, spring case PA6											
Draw wire		stainless steel V2A Ø 0.5 mm											
Weight	[g]	3200 to 5000, depending on the measurement range											
Encoder requirements	[mm]	clamping flange diameter: 36, shaft diameter: 10, shaft length: 20											


[1] Measured with reference encoder with 5000 pulses/revolution. Minimum encoder requirement for improved linearity: 2000 pulses/revolution

TECHNICAL DRAWING LCX50

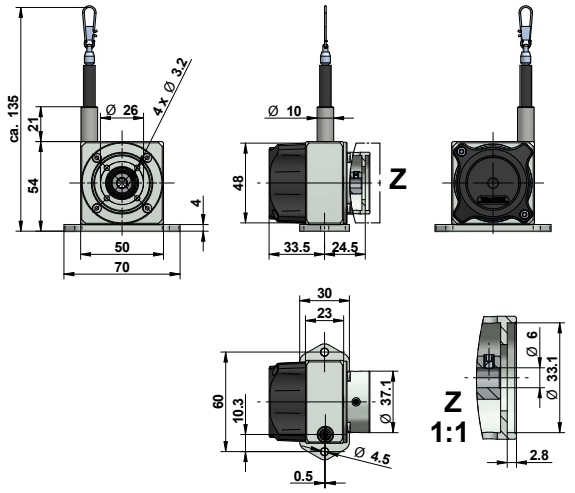


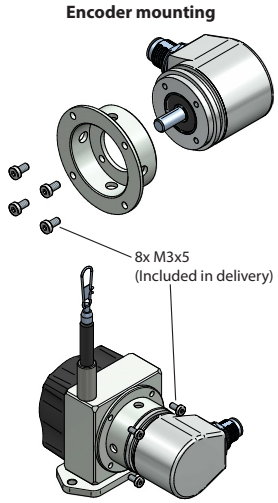


TECHNICAL DRAWING LCX80

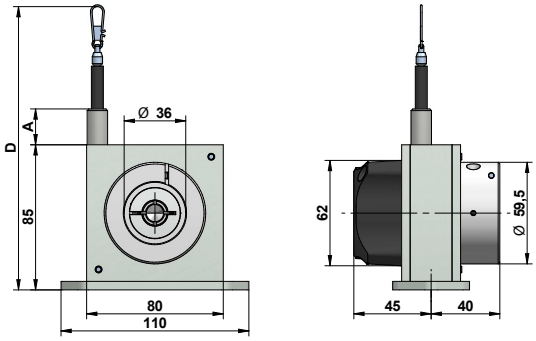


Measurement range [mm]	A	D
1000 / 1500 / 2000	21	≈ 166
2500 / 3000	35	≈ 180






© 2026 Encoder Products Company, REV 1.0 - 10/13/2026

TECHNICAL DRAWING LCX120

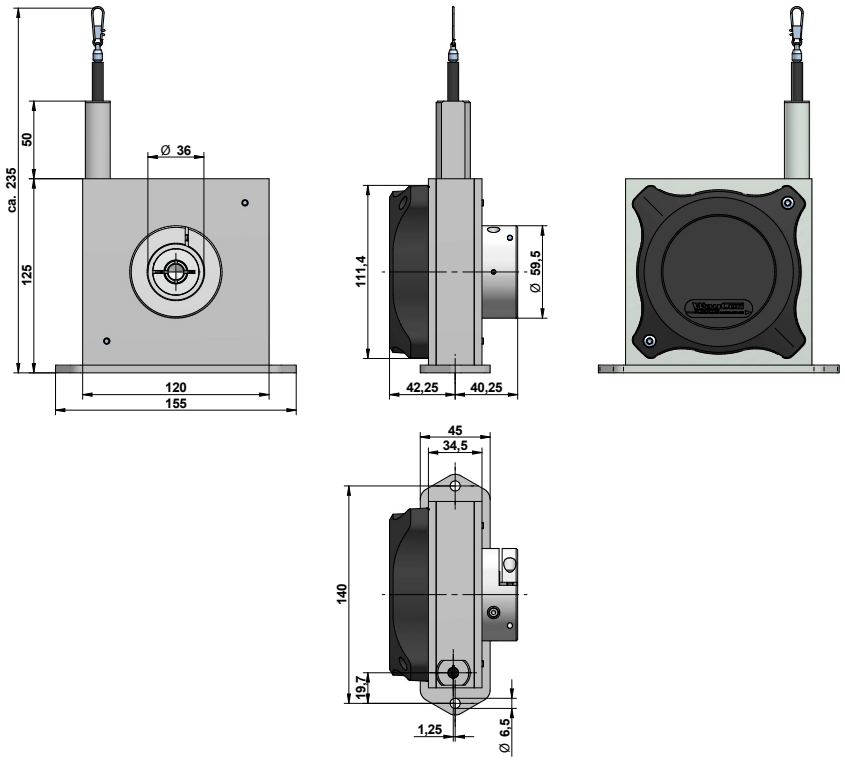

TECHNICAL DRAWING LCX135


Measurement range up to 8 m

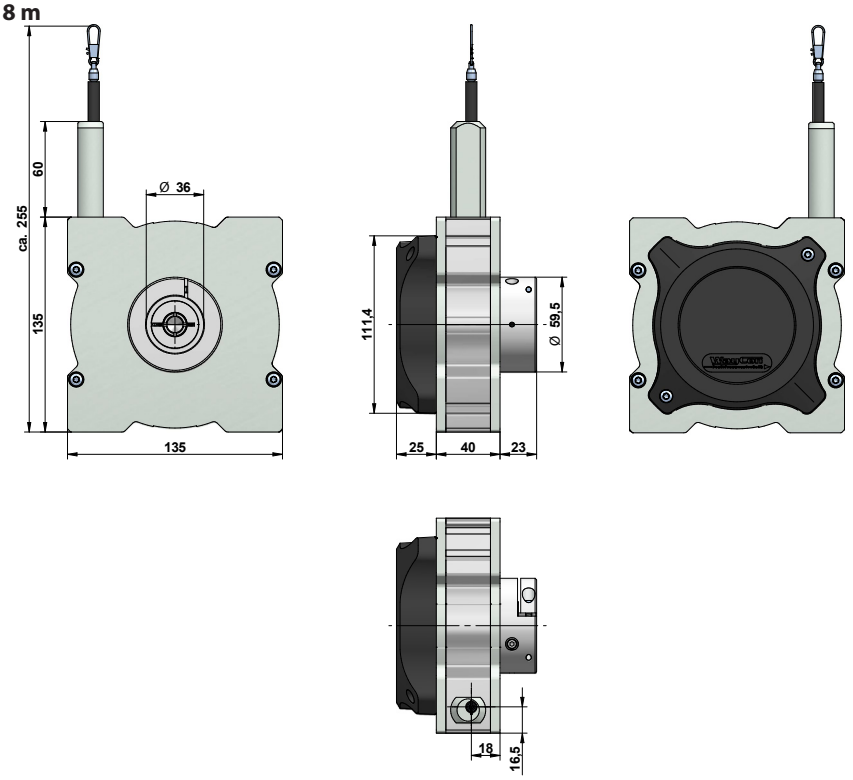

© 2026 Encoder Products Company, REV 1.0 - 10/13/2026

TECHNICAL DRAWING LCX135

Measurement range 10 m or more

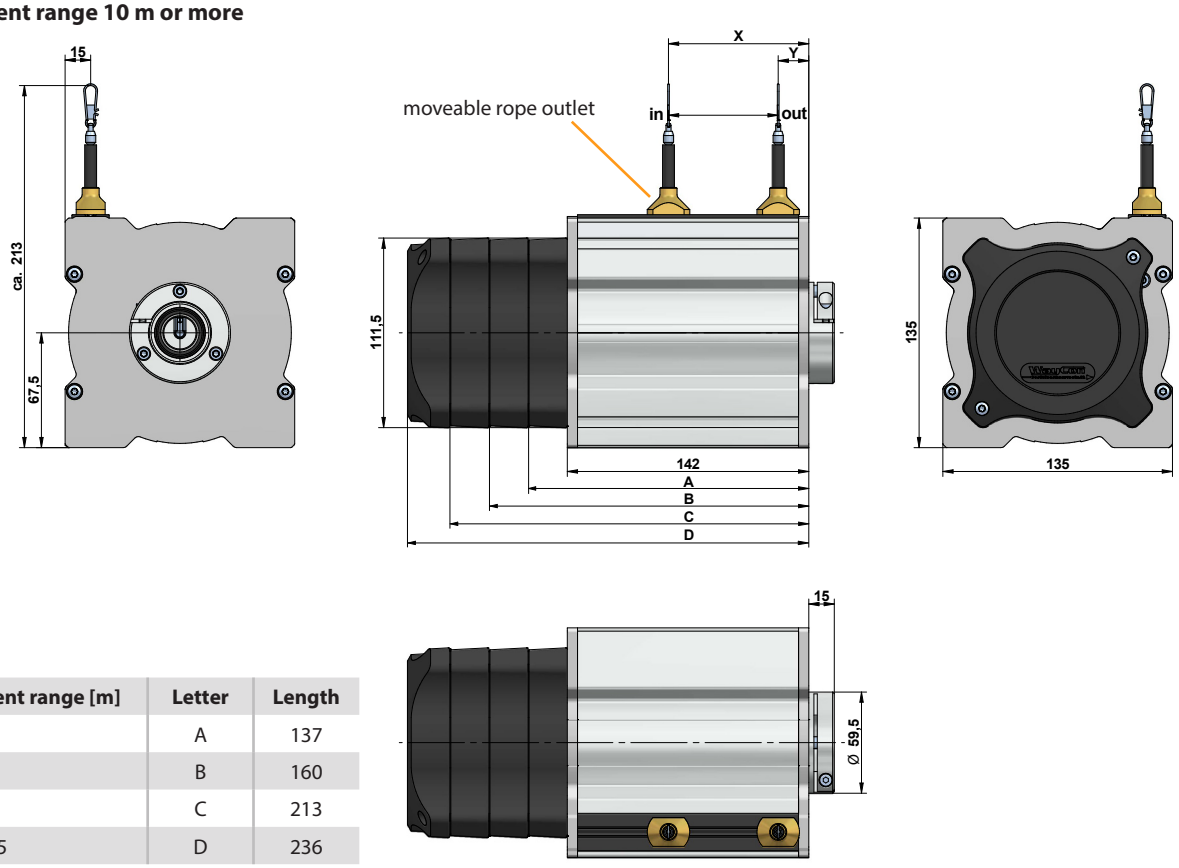

Measurement range [m]	Letter	Length
10 / 12	A	137
15 / 20	B	160
25 / 30	C	213
35 / 40 / 42.5	D	236

Position rope outlet at to	10 m	12 m	15 m	20 m	25 m	30 m	35 m	40 m	42.5 m
to start of measurement range (X) [1]	35.5	38.5	43	50.5	58	65.5	73	80.5	84
to end of measurement range (Y) [1]	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5


[1] Dimensions are subject to a tolerance of ±2 mm.

MOUNTING OPTIONS LCX50, LCX80 AND LCX120


Mounting standard rope outlet, rope outlet sideways top (S1)

The sensor is usually installed by using the regular mounting plate. By disassembling the mounting plate, there are threads in the sensor housing for alternative installation:


LCX50: 2 x M3 and 2 x M5



LCX80: 2 x M4



LCX120: 2 x M4




© 2026 Encoder Products Company, REV 1.0 - 10/13/2026


MOUNTING OPTIONS LCX50, LCX80 AND LCX120

Mounting rope outlet sideways bottom (S2), rope outlet bottom (S3)
Sensors with option rope outlet S2 and S3 have a modified base plate:


LCX50



LCX80

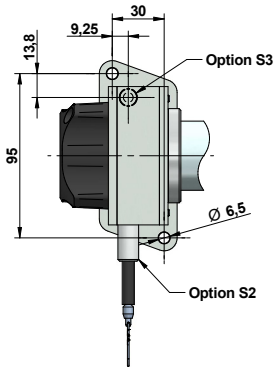

LCX120

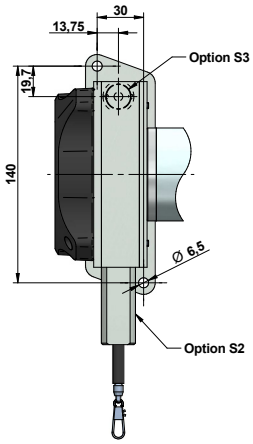


Measurement range [mm]	C
50 / 150 / 250	21.3
75 / 225 / 750	17
100 / 300 / 500 / 1000	12.75
125 / 375 / 625 / 1250	10.3


MOUNTING OPTIONS LCX135

1. Using the grooves in the sensor housing
The included slot nuts can be easily inserted into the grooves of the sensor housing. The slot nuts have a metric M6 thread.
Each sensor with a measurement range of 20 m or lower is delivered with two slot nuts. Each sensor with a measurement range of 25 m or greater is delivered with four slot nuts.


2. Using the angle clamp brackets
The angle clamp brackets feature a bore for M6 screws to fix it on a plate / slab or a profile.
Each sensor with a measurement range of 20 m or lower is delivered with two brackets. Each sensor with a measurement range of 25 m or greater is delivered with four brackets.

Note:
The required number of angle clamp brackets and slot nuts/screws ship with each unit. If additional brackets are required, or replacement parts are needed, please contact EPC Customer Service and order Part Number: 097262.

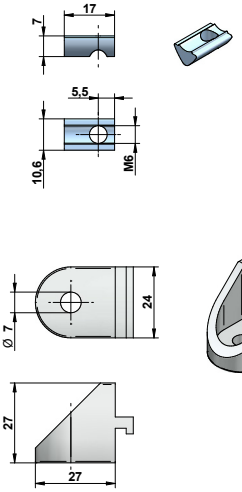


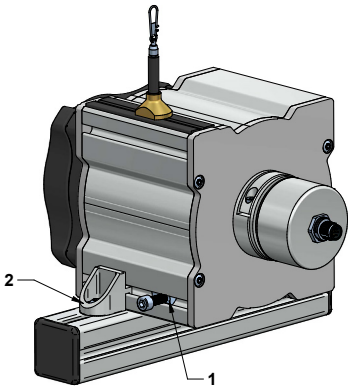

Position of the grooves





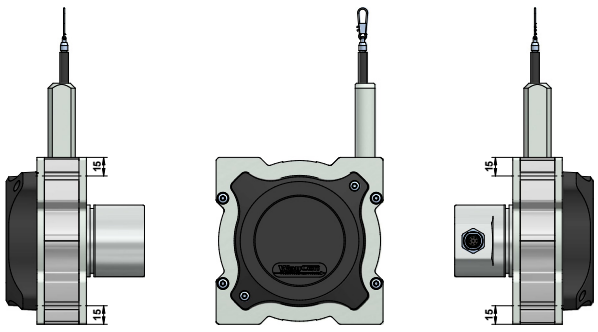


Mounting by using brackets

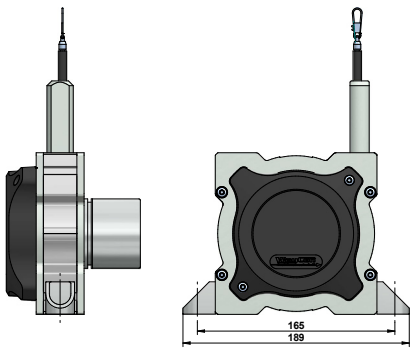

© 2026 Encoder Products Company, REV 1.0 - 10/13/2026

OPTIONS

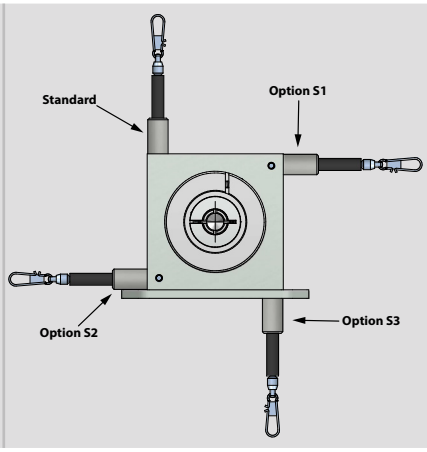Option	Order code	Description
Improved linearity	L02	Improved linearity 0.02 %. Encoder with min. 2000 pulses/revolution is required.
Changed rope outlet	S1, S2, S3	Standard: rope outlet at the top S1: rope outlet sideways at the top S2: rope outlet sideways at the bottom S3: rope outlet on the bottom 
Synthetic wire rope	COR	Synthetic wire rope, made out of abrasion resistant and enhanced Coramid.
Rope fixation by M4 thread	M4	Optional, pivoted rope fixation with screw thread M4, length 22 mm. Ideal for attachment to through holes or thread holes M4.  
Rope fixation by eyelet	RI	The end of the wire rope is equipped with a eyelet instead of a rope clip. Inside diameter 20 mm  
Rope fixation with cylindrical pin and M6 through bore	ZH, ZR	ZH: cylindrical pin with M6 through bore ZR: cylindrical pin with M6 through bore and carbine ring 
Corrosion protection	CP	Includes a V4A wire rope, stainless steel bearings and option M4. The sensors rope drum gets HARTCOAT® coated. This coating is a hard-anodic oxidation that protects the sensor from corrosion by aggressive media (e.g. sea water) with a hard ceramics-like layer.
Increased temperature range low	T40	Special components and a low temperature grease make a working temperature down to -40 °C (up to +85 °C) possible.
Snapping protection	SP61, SP62	Through the use of an integrated brake, the dangerous snapping of the rope is prevented. The option includes a Coramid wire rope Ø 0.4 mm. The maximum travel speed is reduced to 2 m/s. SP61 for measurement ranges 10 to 15 m, SP62 for measurement ranges 20 to 40 m.


© 2026 Encoder Products Company, REV 1.0 - 10/13/2026


ACCESSORIES

Deflection pulley - UR2

The rope must be extracted from the sensor vertically. The maximum variation from the vertical is 3°. A deflection pulley allows a change in the direction of the wire rope. Several pulleys may be used. The rope clip must not be guided over the deflection pulley.
Suitable for standard wire rope diameter 0.5 mm.


Material foot:	anodized aluminum
Material rope wheel:	POM-C
Mounting:	by 2 hexagon socket or countersunk screws M6, vertical or horizontal mounting possible. Ball bearings: with special low temperature grease and RS-sealing.
Temperature:	-40 to +80 °C



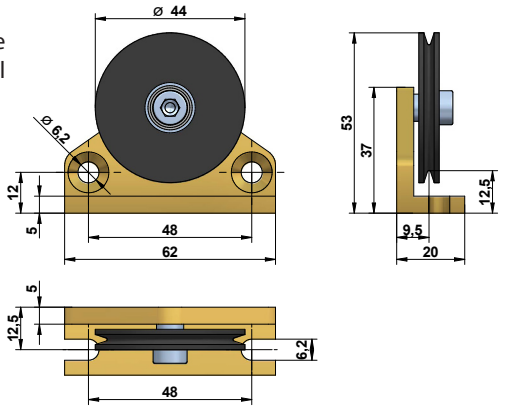


Rope extension - SV

For bridging a greater distance between the measuring target and the sensor a rope extension can be applied. The rope clip must not be guided over the deflection pulley.
Please specify the length needed in your order (XXXX). The minimum length is 150 mm:
SV1-XXXX: rope extension (150 to 4995 mm)
SV2-XXXX: rope extension (5000 to 19995 mm)
SV3-XXXX: rope extension (20000 to 40000 mm)




Magnetic clamp - MGG2

Use the magnetic clamp to quickly attach the rope to metallic objects without any assembly time. A rubber coating provides gentle contact (e.g. on varnished surfaces) and prevents from slipping due to vibration. The magnet consists of a neodymium core for an increased adhesive force of 100 N. The hook makes it easy to attach the rope clip.

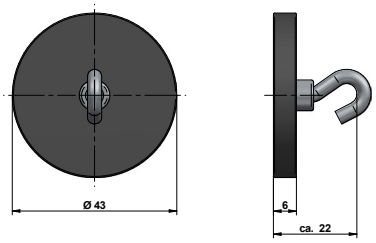

Rope cleaner - RCS

Use the RCS rope cleaner to remove dirt from the measuring rope of the sensor. Please note that the maximum measuring range of the sensor is reduced by 29 mm and that the RCS is not compatible with the option RI.

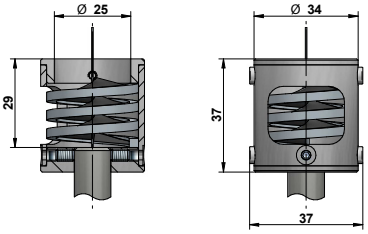

ORDER GUIDE LCX50

LCX50 – □ – F36S – □

Measurement range [mm] 500 / 750 / 1250	
Version Standard Sensor with options	 - O

Option	Description
L02	Improved linearity ±0.02 %
S1	Rope outlet sideways top
S2	Rope outlet sideways bottom
S3	Rope outlet bottom
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
CP	Corrosion protection
T40	Increased temperature -40 to +85°C

Option	Not combinable with
M4	CP
RI	CP
ZH	CP
ZR	CP
CP	M4, RI, ZH, ZR

© 2026 Encoder Products Company, REV 1.0 - 10/13/2026

ORDER GUIDE LCX80

LCX80 – □ – F58NK – □

Measurement range [mm]	
1000 / 1500 / 2000 / 2500 / 3000	

Version	
Standard	-
Sensor with options	O

Option	**Description**
L02	Improved linearity ±0.02 %
S1	Rope outlet sideways top
S2	Rope outlet sideways bottom
S3	Rope outlet bottom
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
CP	Corrosion protection
T40	Increased temperature -40 to +85°C

Option	**Not combinable with**
COR	Measurement range 3000
M4	CP
RI	CP
ZH	CP
ZR	CP
CP	M4, RI, ZH, ZR

ORDER GUIDE LCX120

LCX120 – □ – F58NK – □

Measurement range [mm]	
3000 / 4000 / 5000	

Version	
Standard	-
Sensor with options	O

Option	**Description**
L02	Improved linearity ±0.02 %
S1	Rope outlet sideways top
S2	Rope outlet sideways bottom
S3	Rope outlet bottom
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
CP	Corrosion protection
T40	Increased temperature -40 to +85°C

Option	**Not combinable with**
M4	CP
RI	CP
ZH	CP
ZR	CP
CP	M4, RI, ZH, ZR

© 2026 Encoder Products Company, REV 1.0 - 10/13/2026

ORDER GUIDE LCX135 MEASUREMENT RANGE UP TO 8 m

LCX135 – □ – F58NK – □

Measurement range [m] 6 / 7 / 8	
Version Standard Sensor with options	 - O

Option	Description
L02	Improved linearity ±0.02 %
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
CP	Corrosion protection
T40	Increased temperature -40 to +85°C

Option	Not combinable with
COR	Measurement range 8
M4	CP
RI	CP
ZH	CP
ZR	CP
CP	M4, RI, ZH, ZR

ORDER CODE LCX135 MEASUREMENT RANGE FROM 10 m

LCX135 – □ – F58K – □

Measurement range [m] 10 / 12 / 15 / 20 / 25 / 30 / 35 / 40 / 42.5	
Version Standard Sensor with options	 - O

Option	Description
L02	Improved linearity ±0.02 %
COR	Synthetic wire rope (Coramid)
M4	Rope fixation M4
RI	Rope fixation eyelet
ZH	Cylindrical pin
ZR	Cylindrical pin with carbine ring
CP	Corrosion protection
T40	Increased temperature -40 to +85 °C
SP61	Snapping protection (ranges 10 to 15)
SP62	Snapping protection (ranges 20 to 42.5)

Option	Not combinable with
COR	SP61, SP62
M4	CP
RI	CP
ZH	CP
ZR	CP
CP	M4, RI, ZH, ZR, SP61, SP62
SP61	MR >15 m, COR, CP, T40
SP62	MR <20 m, MR 42,5 m, COR, CP, T40

ACCESSORIES

UR2	deflection pulley (for rope diameter 0.5 mm)
MGG2	magnetic clamp
SV1-XXXX	rope extension (150 mm up to 4995 mm)
SV2-XXXX	rope extension (5000 mm up to 19995 mm)
SV3-XXXX	rope extension (20000 mm up to 40000 mm)

RCS-LCX50 [1)]	rope cleaner for LCX50
RCS-LCX80 [1)]	rope cleaner for LCX80 ranges 1000, 1500 and 2000 mm
RCS-LCX80-32 [1)]	rope cleaner for LCX80 ranges 2500 and 3000 mm
RCS-LCX120 [1)]	rope cleaner for LCX120
RCS-LCX135-8 [1)]	rope cleaner for LCX135 range up to 8 m
RCS-LCX135 [1)]	rope cleaner for LCX135 range 10 m or more

[1)] please note that the maximum measuring range is reduced by 29 mm when using the rope cleaner. The RCS is not compatible with the option RI.

© 2026 Encoder Products Company, REV 1.0 - 10/13/2026