

MODEL A25SB - ABSOLUTE SHAFT ENCODER



Ø2.5"



FEATURES

- Single Turn/Multi-Turn Absolute Encoder (16 Bit ST / 43 Bit MT)
- SSI or CANopen® communication
- Maintenance-free and environmentally friendly magnetic design
- Energy harvesting magnetic multi-turn technology
- No gears or batteries
- IP67 sealing available
- Servo and flange mounting
- Standard Size 25 package (2.5" x 2.5")
- Meets CE/EMC standards for immunity and emissions


The Model A25SB Absolute Encoder offers a high performance solution for your absolute feedback needs. This encoder is especially suited for applications where position information must be retained after loss of system power. It provides maintenance-free feedback thanks to its innovative battery-free and gear-free multi-turn technology. This encoder is the perfect choice for harsh industrial applications thanks to its rugged magnetic technology, available IP67 rating, and proven double bearing design. Available with several shaft sizes and mounting styles, the Model A25SB is easily designed into OEM and aftermarket applications.

COMMON APPLICATIONS

Robotics, Telescopes, Antennas, Medical Scanners, Wind Turbines, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

MODEL A25SB ORDERING GUIDE

Blue type indicates price adder options

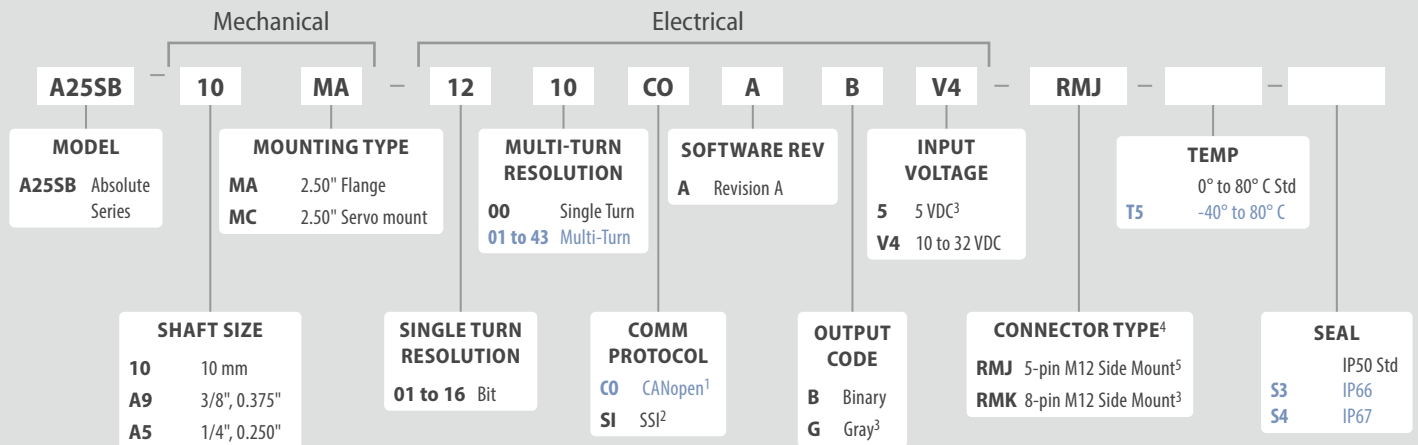

Notes:

- Please refer to [CANopen® Interface Technical Reference Manual](#) at encoder.com.
- Please refer to Technical Bulletin [TB-529: Understanding EPC's SSI Encoders](#) at encoder.com.
- Available with SSI only.
- For mating connectors, cables, and cordsets see Accessories at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see [Connector Pin Configuration Diagrams](#) at encoder.com.
- Available with CANopen® only.

MODEL A25SB - ABSOLUTE SHAFT ENCODER

MODEL A25SB SPECIFICATIONS

Electrical

Input Voltage.....10 to 32 VDC max SSI or CANopen®
5 VDC SSI Only
 Input Current.....50 mA typical for 10 to 32 VDC
80mA typical for 5 VDC
 Power Consumption.....0.5 W max
 Resolution (Single).....01 to 16 bit
 Resolution (Multi)01 to 43 bit
 Accuracy.....± 0.35°
 Repeatability.....± 0.2°
 CE/EMC.....Immunity tested per EN 61000-6-2:2006
Emissions tested per EN 61000-6-3:2011

CANopen® Interface

Protocol.....CANopen®:
Communication profile CiA 301
Device profile for encoder CiA 406 V3.2 class C2
 Node Number.....0 to 127 (default 127)
 Baud Rate.....10 Kbaud to 1 Mbaud with automatic bit rate detection
 Note: The standard settings, as well as any customization in the software, can be changed via LSS (CiA 305) and the SDO protocol (e.g., PDOs, scaling, heartbeat, node-ID, baud rate, etc.)

Programmable CANopen Transmission Modes

Synchronous.....When a synchronization telegram (SYNC) is received from another bus node, PDOs are transmitted independently
 Asynchronous.....A PDO message is triggered by an internal event (e.g., change of measured value, internal timer, etc.)

SSI Interface

Clock Input.....Via opto coupler
 Clock Frequency.....100KHz to 500KHz. Higher frequencies may be available. Contact Customer Service.
 Data Output.....RS485 / RS422 compatible
 Output Code.....Gray or binary
 SSI Output.....Angular position value
 Parity Bit.....Optional (even/odd)
 Error Bit.....Optional
 Turn On Time.....< 1.5 sec
 Pos. Counting Dir.Connect DIR to GND for CW
Connect DIR to VDC for CCW
(when viewed from shaft end)
 Set to Zero.....Yes, see Technical Bulletin *TB-529: Understanding EPC's SSI Encoders*
 Protection.....Galvanic Isolation

Mechanical


Max Shaft Speed.....8,000 RPM
 Shaft Material.....303 Stainless Steel
 Radial Shaft Load80 lb (355 N) max. Rated load of 20 to 40 lb (88 to 177 N) = bearing life of 1.5 x10⁹ revolutions
 Axial Shaft Load80 lb (355 N) max. Rated load of 20 to 40 lb (88 to 177 N) = bearing life of 1.5 x10⁹ revolutions
 Starting Torque.....1.0 oz-in typical with no seal
3.0 oz-in typical with IP66 shaft seal
7.0 oz-in typical with IP67 shaft seal
 Housing.....Black non-corrosive finish
 Weight.....20 oz typical

Environmental


Storage Temp.....-40° to 100° C
 Humidity.....95% RH non-condensing
 Vibration.....5 g @ 10 to 2000 Hz
 Shock.....100 g @ 6 ms duration
 Sealing.....IP50 standard; IP66 or IP67 optional

MODEL A25SB - ABSOLUTE SHAFT ENCODER

MODEL A25SB 2.5" FLANGE MOUNT (MA)

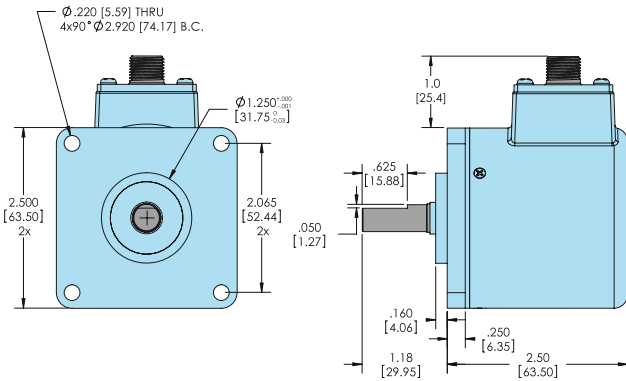

MODEL A25SB 2.5" SERVO MOUNT (MC)

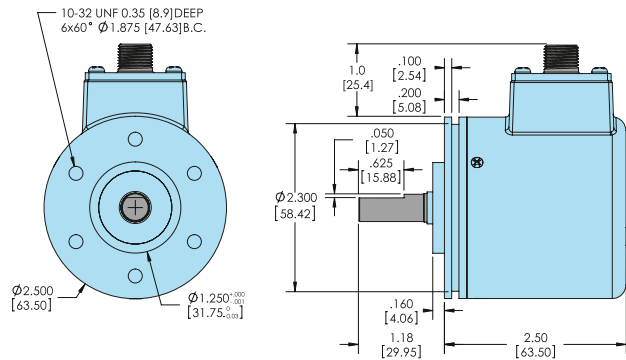

All dimensions are in inches with a tolerance of ± 0.005 " or ± 0.01 " unless otherwise specified. Metric dimensions are given in brackets [mm].

MODEL A25SB - ABSOLUTE SHAFT ENCODER


WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.

For CE (Conformity European) requirements, use M12 cordset with shield connected to M12 coupling nut. Trim back and insulate unused wires.

SSI Encoders


8-pin M12



Function	Pin
Ground (GND)	1
+VDC	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	Housing

CANopen® Encoders

5-pin M12



Function	Pin
+VDC	2
Ground (GND)	3
CAN _{High}	4
CAN _{Low}	5
CAN _{GND} / Shield	1

EPC RESERVES THE RIGHT TO UPDATE, REVISE AND AMEND ALL SOFTWARE AND TECHNICAL DATA OR CONTENT AT ANY TIME. EPC SHALL HAVE NO LIABILITY OF ANY KIND OR NATURE FOR ANY TECHNICAL ERRORS OR OMISSIONS IN ANY SOFTWARE OR TECHNICAL DATA. See encoder.com for more information.