

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER



Ø58 mm



FEATURES

- Single Turn/Multi-Turn Absolute Encoder (16 Bit ST / 43 Bit MT)
- SSI, CANopen®, or SAE J1939 communication
- Maintenance-free and environmentally friendly magnetic design
- Energy harvesting magnetic multi-turn technology
- No gears or batteries
- 58 mm (2.28") diameter blind hollow bore encoder
- Flex mount eliminates couplings and is ideal for motors and shafts
- Meets CE/EMC standards for immunity and emissions

The Model A58HB absolute encoder offers a high performance solution for your absolute feedback needs. It provides maintenance-free feedback thanks to its innovative battery-free and gear-free multi-turn technology. This encoder is especially suited for applications where position information must be retained after loss of system power. Its rugged magnetic technology and high IP rating make the Model A58HB an excellent choice, even in tough industrial environments. Available with bores up to 3/8" or 14 mm and two flexible mounting options, the Model A58HB is easily designed into a variety of applications.

COMMON APPLICATIONS

Robotics, Telescopes, Antennas, Medical Scanners, Wind Turbines, Elevators, Lifts, Motors, Automatic Guided Vehicles, Heavy Duty Vehicles, Cranes, Rotary and X/Y Positioning Tables

MODEL A58HB ORDERING GUIDE

Blue type indicates price adder options

Model	Mechanical	Electrical
A58HB	06 SQ	14 18 CO A B V2 RMJ NR
MODEL A58HB Absolute series blind hollow bore encoder	MOUNTING TYPE SQ 108 mm BC flex arm SR 63 mm BC 2-pt. flex mount	MULTI-TURN RESOLUTION 00 Single Turn 01 to 43 Multi-Turn
BORE SIZE 06 6 mm 07 7 mm 08 8 mm 10 10 mm 12 12 mm 14 14 mm A5 0.250", 1/4" A9 0.375", 3/8"	SINGLE TURN RESOLUTION 01 to 16 Bit	SOFTWARE REV A Revision A
	COMMUNICATION PROTOCOL CO CANopen ¹ CJ SAE J1939 ^{2,3} SI SSI ⁴	INPUT VOLTAGE 5 5 VDC ⁵ V2 5 to 32 VDC
	OUTPUT CODE B Binary G Gray ⁵	TERMINATING RESISTOR⁷ NR None (Std) RS Internal resistor option (fixed 120 Ohm)
	CONNECTOR TYPE⁶ RMJ 5-pin M12 radial mount ⁷ RMK 8-pin M12 radial mount ⁵	

Notes:

- Please refer to CANopen Interface Technical Reference Manual at encoder.com.
- Please refer to Technical Bulletin TB-546: SAE J1939 Interface and Process Data at encoder.com.
- SAE J1939 can transmit a maximum of 32 bits in process data. The sum of single turn and multiturn results in a maximum of 32 bits. This can be, for example, 12-bit MT or 16-bit ST and 16-bit MT.
- Please refer to Technical Bulletin TB-529: Understanding EPC's SSI Encoders at encoder.com.
- Available with SSI only.
- For mating connectors, cables, and cordsets see Accessories at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see Connector Pin Configuration Diagrams at encoder.com.
- Available with CANopen and SAE J1939 only.

EPC RESERVES THE RIGHT TO UPDATE, REVISE AND AMEND ALL SOFTWARE AND TECHNICAL DATA OR CONTENT AT ANY TIME. EPC SHALL HAVE NO LIABILITY OF ANY KIND OR NATURE FOR ANY TECHNICAL ERRORS OR OMISSIONS IN ANY SOFTWARE OR TECHNICAL DATA.

See encoder.com for more information.

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER

Electrical

Input Voltage	5 to 32 VDC max SSI or CANopen 5 VDC SSI Only
Input Current	50 mA typical for 5 to 32 VDC 80 mA typical for 5 VDC
Power Consumption	0.5 W max
Resolution (Single)	01 to 16 bit
Resolution (Multi)	01 to 43 bit
Accuracy	<±0.0878°
Repeatability	<±0.0878°
CE/EMC	Immunity tested per EN 61000-6-2:2006 Emissions tested per EN 61000-6-3:2011

Mechanical

Max Shaft Speed	6000 RPM
Shaft Rotation	Bi-directional
Bore Depth	17mm (0.669")
User Shaft Radial Runout	0.007" max
Radial Shaft Load	Bearing life of 1.4x10 ⁹ revolutions: 17lbs (80 N)
Axial Shaft Load	Bearing life of 1.4x10 ⁹ revolutions: 11lbs (50 N)
Starting Torque	2.3 oz-in typical
Housing	All metal with protective finish
Weight	7.5 oz typical

Environmental

Operating Temp	-40° C to 85° C
Storage Temp	-40° C to 100° C
Humidity	95% RH non-condensing
Vibration	30.6 g (10 Hz up to 2000 Hz)
Shock	510 g @ 6 ms duration
Sealing	IP67, shaft sealed to IP65

CANopen Interface

Protocol	CANopen Communication profile CiA 301 Device profile for encoder CiA 406 V3.2 class C2
Node Number	0 to 127 (default 127)
Baud Number	10 Kbaud to 1 Mbaud with automatic bit rate detection
NOTE: The standard settings as well as any customization in the software can be changed via LSS (CiA 205) and the SDO protocol (e.g. PDOs, scaling, heartbeat, node-ID, baud rate, etc.)	

Programmable CANopen Transmission Modes

Synchronis	When a synchronization telegram (SYNC) is received from another bus node, PDOs are transmitted independently
Asynchronis	A PDO message is triggered by an internal event (e.g. change of measured value, internal timer, etc.)

SAE J1939


CAN physical layer	ISO 11898 (High Speed CAN)
Protocol	ISO 11898 (High Speed CAN)
Baud Rate	Auto-Baud-Detection
Standard Preset configuration	(other configurations on request)
Direction of counting	CCW (view from shaft end)
ECU-address	0x0A
Process data Identifier	0x18FF000A
PGN	0xFF00
Process data mapping	Byte 0-3 32 Bit Position Value Byte 4 8 Bit Error Register PDU timer and Position Preset can be adjusted by PGN configuration 0xEF00 (Prop. A)
PDU - Time	50ms (default)
Configuration - PGN	0xEF 00 (Prop. A)
Byte 0	0x01
Byte 1	0xFF
Byte 2	PDU time LSB
Byte 3	PDU time MSB
Byte 4	Preset LSB
Byte 5,6	Preset
Byte 7	Preset MSB

SSI Interface


Clock Input	Via opto coupler
Clock Frequency	100Kz to 500Kz, Higher frequencies may be available. Contact Customer Service.
Data Output	RS485/RS422 compatible
Output Code	Gray or binary
SSI Output	Angular position value
Parity Bit	Optional (even/odd)
Error Bit	Optional
Turn On Time	< 1.5 sec
Pos Counting Dir	Connect DIR to GND for CW Connect DIR to VDC for CCW (when viewed from shaft end)
Set to Zero	Yes, see Technical Bulletin TB529: Understanding EPC's SSI Encoders
Protection	Galvanic Isolation with SSI option

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER

MODEL A58HB 108 MM BC FLEX ARM (SQ)

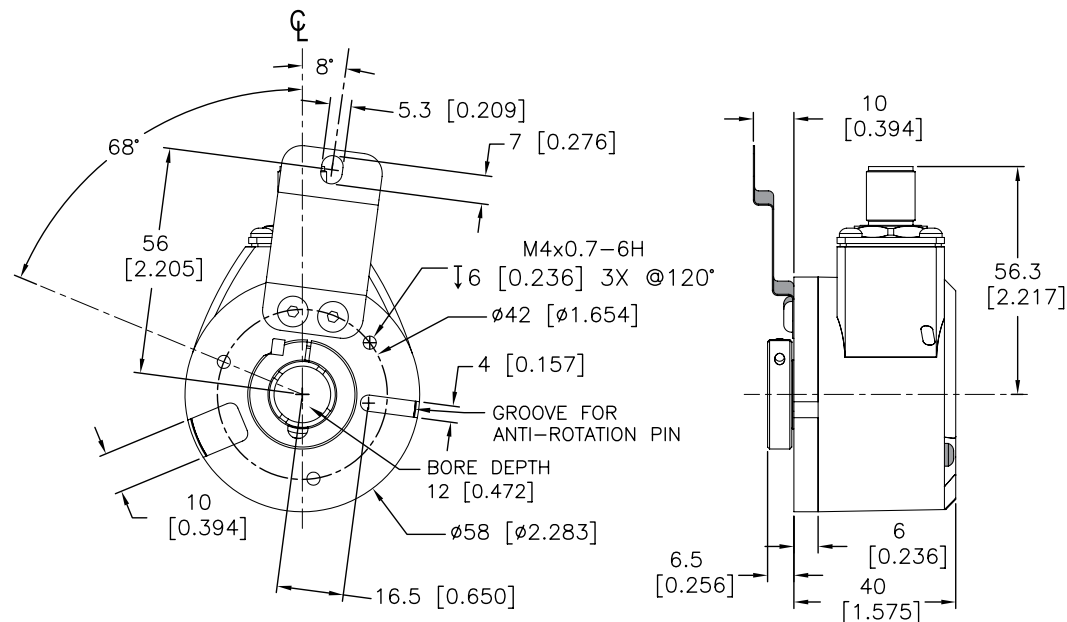

MODEL A58HB 63 MM 2 PT. FLEX MOUNT (SR)

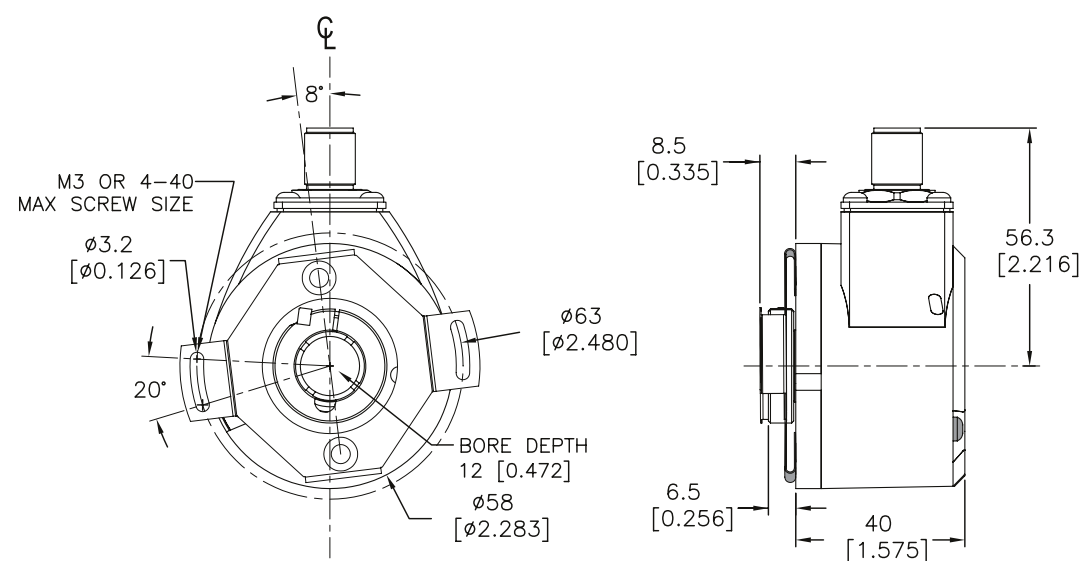

Primary dimensions are in mm, secondary dimensions [inches] in brackets for reference only.


MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.


For CE (Conformity European) requirements, use M12 cordset with shield connected to M12 coupling nut. Trim back and insulate unused wires.

SSI Encoders 8-pin M12



Function	8-Pin M12
Ground (GND)	1
+VDC	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	Housing

CANopen and SAE J1939 Encoders 5-pin M12



Function	5-Pin M12
+VDC	2
Ground (GND)	3
CAN _{High}	4
CAN _{Low}	5
CAN _{GND} / Shield	1

M12 connector is connected to encoder housing.