

MODEL TR2 – LINEAR SOLUTION ENCODER



FEATURES

Encoder with Rack-and-Pinion Gear Integrated into One Compact Unit
 Easily Installed in a Vertical, Horizontal or Upside Down Orientation
 Operates at Speeds up to 400 Feet per Minute
 Spring Loaded Torsion Arm Eliminates Gear Backlash
 Integrated Module Simplifies Your System Design


The TR2 Tru-Trac™ is a versatile solution for tracking velocity, position, or distance in almost any application and features an integrated encoder with a rack-and-pinion gear assembly. Using the rack-and-pinion gear system, encoder readings can be obtained with repeatable positioning, providing excellent accuracy. Racks can be ordered in varying lengths, and with the accessory spacer block, multiple lengths of rack can be joined for easy installation. The spring loaded torsion arm provides easily adjustable torsion load, giving the TR2 all the flexibility and maneuverability of the original TR1 Tru-Trac™. It can be installed in a horizontal, vertical, or upside down position. The threaded shaft on the TR2's pivot axis is field reversible, providing mounting access from either side. And the durable conductive composite housing material reduces static build up.

COMMON APPLICATIONS

X-Y Tables, Gantry Systems, Packaging Machinery, Cut-to-Length, Printing, Labeling, Document Handling, Machine Shop Equipment

MODEL TR2 TRU-TRAC™ ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

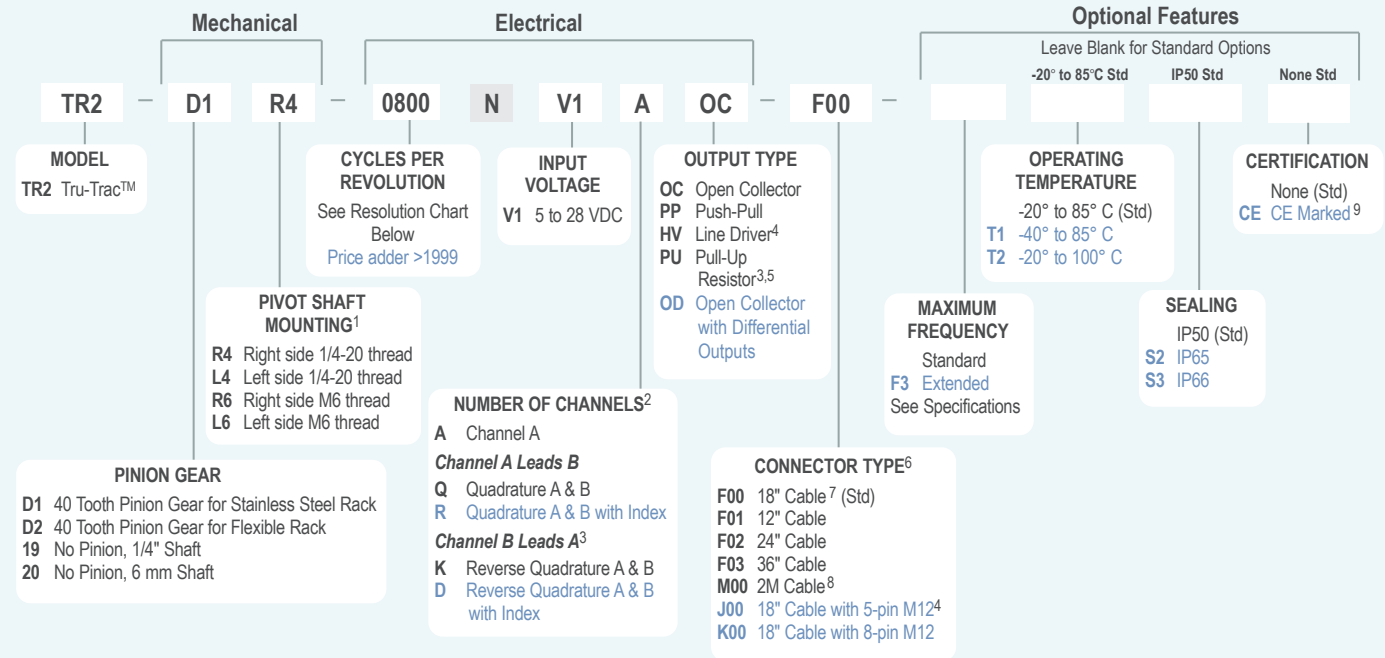

MODEL TR2 TRU-TRAC™ CPR OPTIONS

0001 thru 0189*	0198	0200	0250	0256	0300	0315	0360
0400	0500	0512	0580	0600	0750	0800	1000
1200	1250	1500	1800	2000	2048	2500	2540
3600	4000	4096	5000	6000	7200	8192	10,000

New CPR values are periodically added to those listed. Contact Customer Service to determine all currently available values. Special disk resolutions are available upon request and may be subject to a one time NRE fee.

NOTES:

- See mechanical drawing. Shaft is reversible in the field.
- Contact Customer Service for non-standard index gating or phase relationship options.
- Reverse Quadrature not available with Pull-Up Resistor Output Type.
- Line Driver output not available with 5-pin M12 connector. Additional cable lengths available. Please consult Customer Service.
- With Input Voltage above 16 VDC, operating temperature is limited to 85° C.
- For mating connectors, cables, and cordsets see [Accessories](#) at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see [Connector Pin Configuration Diagrams](#) at encoder.com..
- For non-standard English cable lengths enter 'F' plus cable length expressed in feet. Example: F06 = 6 feet of cable. Frequency above 300 kHz standard cable lengths only.
- For non-standard metric cable lengths enter 'M' plus cable length expressed in meters. Example: M06 = 6 meters of cable.
- Please refer to Technical Bulletin [TB100: When to Choose the CE Mark](#) at encoder.com.

MODEL TR2 TRU-TRAC™ SPECIFICATIONS

Electrical

Input Voltage.....4.75 to 28 VDC max for temperatures up to 85° C 4.75 to 24 VDC for temperatures between 85° C to 100° C

Input Current 100 mA max (65 mA typical) with no output load

Output Format.....Incremental – Two square waves in quadrature with channel A leading B for clockwise shaft rotation, as viewed from the wheel side. See *Waveform Diagram*.

Output Types.....Open Collector- 20 mA max per channel
Push-Pull – 20 mA max per channel
Pull-Up – Open Collector with 2.2K ohm internal resistor, 20 mA max per channel
Line Driver – 20 mA max per channel (Meets RS 422 at 5 VDC supply)

Index.....Once per revolution.
0190 to 10,000 CPR: Gated to output A.
0001 to 0189 CPR: Ungated
See *Waveform Diagram*.

Max. FrequencyStandard Frequency Response is 200 kHz for CPR 1 to 2540
500 kHz for CPR 2541 to 5000
1 MHz for CPR 5001 to 10,000
Extended Frequency Response (optional) is 300 kHz for CPR 2000, 2048, 2500, & 2540

Electrical Protection...Reverse voltage and output short circuit protected. NOTE: Sustained reverse voltage may result in permanent damage.

Noise Immunity.....Tested to BS EN61000-6-2; BS EN50081-2; BS EN61000-4-2; BS EN61000-4-3; BS EN61000-4-6, BS EN500811

Quadrature.....67.5° electrical or better is typical,
Edge Separation 54° electrical minimum at temperatures >99° C

Waveform Symmetry...180°(±18°) electrical (single channel encoder)
Accuracy.....Within 0.017° mechanical or 1 arc-minute from true position (for CPR>189)

Mechanical

Radial Shaft Load5 lb max. Rated load of 2 to 3 lb for bearing life of 1.2 x 10¹⁰ revolutions

Axial Shaft Load5 lb max. Rated load of 2 to 3 lb for bearing life of 1.2 x 10¹⁰ revolutions

Starting TorqueIP50 0.05 oz-in
IP65 0.4 oz-in
IP66 0.8 oz-in

HousingStainless steel fibers in a high temperature nylon composite

Weight.....5 oz typical

Environmental

Storage Temp-25° to 85° C

Humidity.....98% RH non-condensing

Vibration.....10 g @ 58 to 500 Hz

Shock.....80 g @ 11 ms duration

Sealing.....IP50 standard; IP65 or IP66 available

Mechanical – Stainless Steel Rack

Max Linear Speed400 Feet Per Minute. Speeds over 200 FPM require lubricant, such as MoS₂ paste, to reduce gearing wear. Higher speeds may be achievable, contact Customer Service.

Rack Material303 Stainless Steel

Gearing Tolerance....AGMA 10, 20 degree pressure angle teeth

Accuracy.....±0.0005 inch/inch max accumulated error

Repeatability±0.0001 inch

Mechanical – Flexible Rack

Max Linear Speed200 Feet Per Minute


Rack MaterialAcetal

Gearing Geometry...20° pressure angle teeth

Accuracy.....±0.002 inch/inch max accumulated error

Repeatability±0.001 inch for Flexible Rack

MODEL TR2 TRU-TRAC™

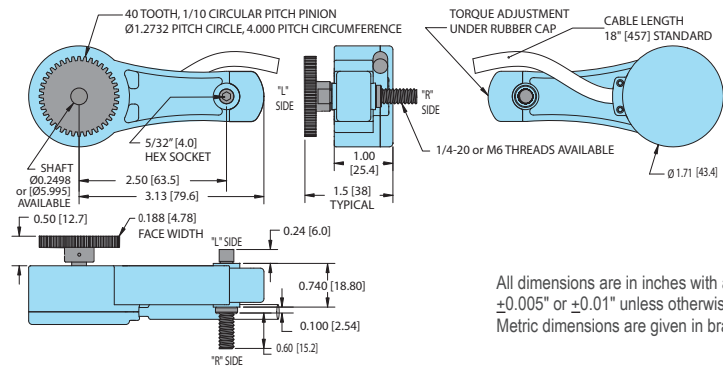

All dimensions are in inches with a tolerance of ±0.005" or ±0.01" unless otherwise specified. Metric dimensions are given in brackets [mm].

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.

Trim back and insulate unused wires.

Function	Gland Cable† Wire Color	5-pin M12**	8-pin M12**
Com	Black	3	7
+VDC	White	1	2
A	Brown	4	1
A'	Yellow	--	3
B	Red	2	4
B'	Green	--	5
Z	Orange	5	6
Z'	Blue	--	8
Shield	Bare*	--	--

*CE Option: Cable shield (bare wire) is connected to internal case.

†Standard cable is 24 AWG conductors with foil and braid shield.

**CE Option: Use cable cordset with shield connected to M12 connector coupling nut.

RESOLUTIONS – English Units

Inches per Pulse	Pulses per Inch	Disc Cycles per Revolution
0.01	100	400
0.005	200	800
0.004	250	1000
0.002	500	2000
0.001	1000	2000*
0.0005	2000	2000**
0.0004	2500	2500**
0.0002	5000	2500***
0.0001	10,000	2500****

*Requires 2x external quadrature counting.

**Requires 4x external quadrature counting.

†Requires 2x Interpolation.

++Requires 4x Interpolation.

RESOLUTIONS – Metric Units


mm per Pulse	Pulses per mm	Disc Cycles per Revolution
0.04	25	2540
0.02	50	2540*
0.01	100	2540**

*Requires 2x external quadrature counting.

**Requires 4x external quadrature counting.

WAVEFORM DIAGRAM


Incremental Signals

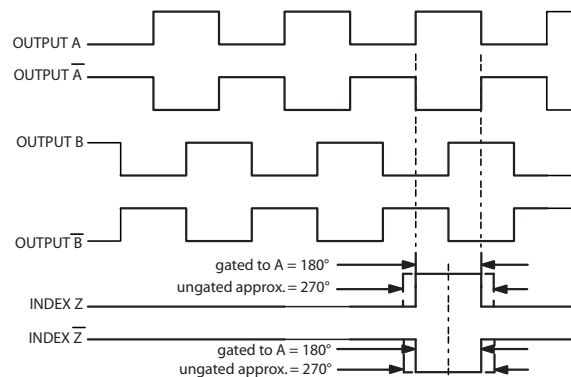


CLOCKWISE ROTATION AS VIEWED FROM THE SHAFT SIDE

NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES.
WAVEFORM SHOWN WITH OPTIONAL COMPLEMENTARY SIGNALS
A, B, Z FOR HV OUTPUT ONLY.

PINION GEAR FOR FLEXIBLE RACK

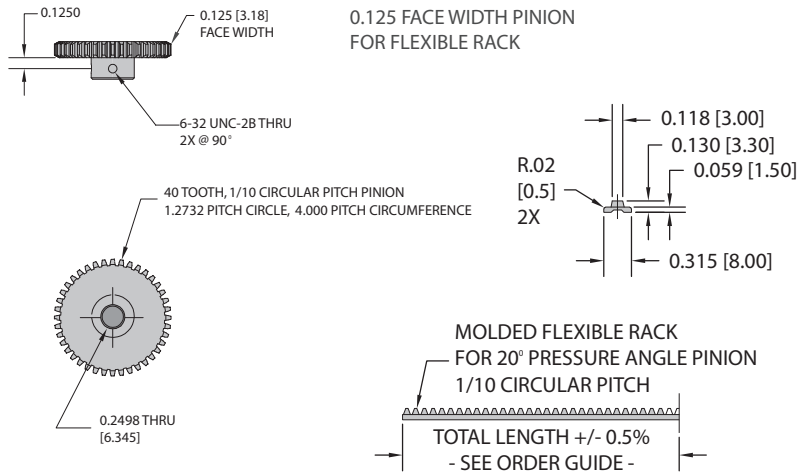


PINION GEAR FOR STAINLESS STEEL RACK

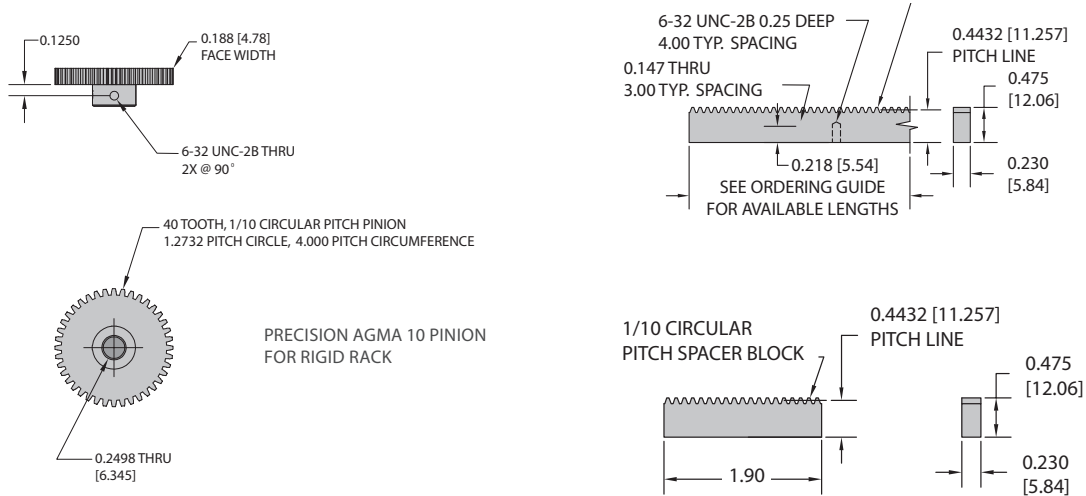

TRU-TRAC™ MOUNTING BRACKET

Allows for a variety of mounting positions and makes installation of the Model TR2 even easier.

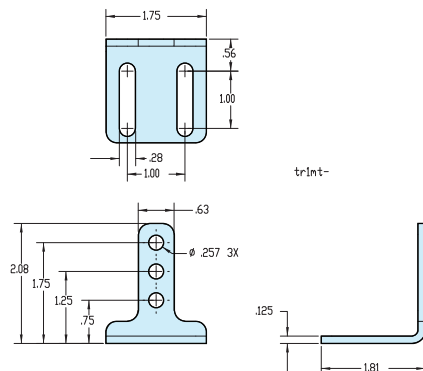

STOCK #140104